


SPECIFICATION TABLE 1	
MXX	Length
10M	10 meter
70M	70 meter
50M	50 meter
SPECIFICATION TABLE 3	
XX	Length
12	12' +/- 1.5"
24	24' +/- 1.5"
36	36' +/- 1.5"

SPECIFICATION TABLE 2			
XXX	Fiber Count	Cable OD	
12	12 Fiber	6.5mm +/- 0.2	
24	24 Fiber	8.5mm +/- 0.2	
36	36 Fiber	10.5mm +/- 0.2	
48	48 Fiber	12.5mm +/- 0.2	
72	72 Fiber	21mm +/- 0.8	
96	96 Fiber	25.8mm +/- 0.8	
144	144 Fiber	28.2mm +/- 0.8	

Revisions			
REV	DESCRIPTION	Date	Approved
00	PRODUCTION RELEASE	12/12/10	RP

MXX
See Table 1

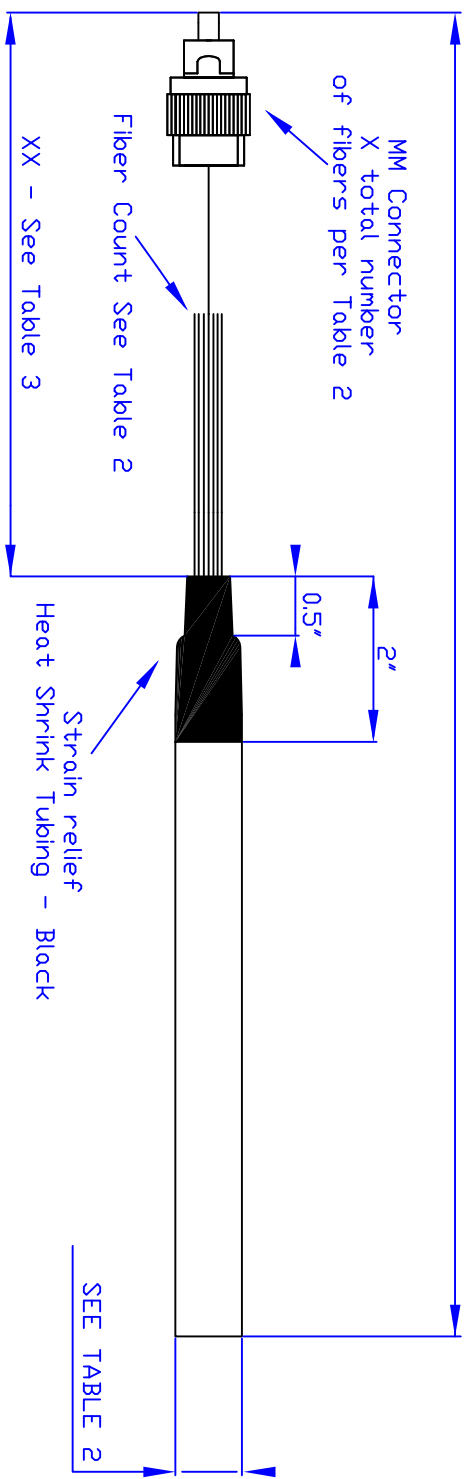

Specification Notes:

1. Fiber type: MM Corning 62.5um (OM1) or 50um (OM2)
900um tight buffer with kevlar distribution cable Orange
2. I.L. <-0.50dB
R.L. <-35dB
3. Connector Geometry exceeds
Telcordia GR-326-CORE

Intellectual Property of Precision Fiber Products, INC. DO NOT duplicate. Return copies upon completion		Precision Fiber Products, Inc	
UD.S. N/A	Size:	MM Multifiber indoor 900um Tight Buffer Cable Assembly	REV 00
MATL: See Specification Notes		DWG NO. MMXXXXBT-xx-xx-xxx-xx	12/12/2010 Sheet 1 of 1