


PFP FUSION SPLICE PROTECTION SLEEVES

The most popular method of protecting a fusion splice is the utilization of two heat sensitive tubes supported by a stainless steel rod. Our protection sleeve contains a custom inner tube made of polyolifin, which melts around the fiber to provide both moisture and cushion protection. The Teflon-treated inner tube allows easy fiber entry. The sleeve shrinks to a size that allows insertion into most fusion splice trays. This is a proven shrink tube design used in thousands of telcomm and datacomm applications.

Features

- Polished stainless steel rod
- Polyolifin® clear inner tube provides moisture and cushion protection
- Te on-coated inner tube
- Fits most popular splice trays including the PFP PFP-6808 and PFP-8729 (AMP 501518-1)
- Competitively priced and stocked for immediate delivery
- Installed using a heat gun or protection sleeve oven

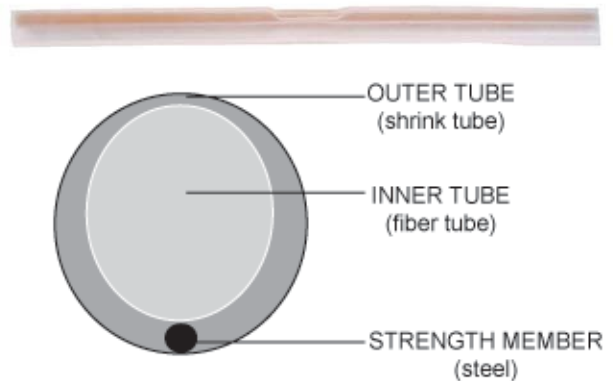

SPECIFICATIONS

Part Number	Length	Steel Rod	Outer Tube	Inner Tube (before Shrinkage)	Operating Temperature	Final Shrink Diameter
PFP-1002C-25	60mm + 0.1	1.6mm Diameter	4.8mm Diameter	1.6mm Inside Diameter	105°C	3.0mm
PFP-1002C-50	tolerance	(Stainless Steel)				
PFP-100240C-25	40mm + 0.1	1.6mm Diameter	4.8mm Diameter	1.6mm Inside Diameter	105°C	3.0mm
PFP-100240C-50	tolerance	(Stainless Steel)				
PFP-S25C-25	60mm + 0.1	1.0mm Diameter	4.1mm Diameter	1.6mm Inside Diameter	105°C	2.5mm
PFP-S25C-50	tolerance	(Stainless Steel)				
PFP-S2540C-25	40mm + 0.1	1.0mm Diameter	4.1mm Diameter	1.6mm Inside Diameter	105°C	2.5mm
PFP-S2540C-50	tolerance	(Stainless Steel)				